


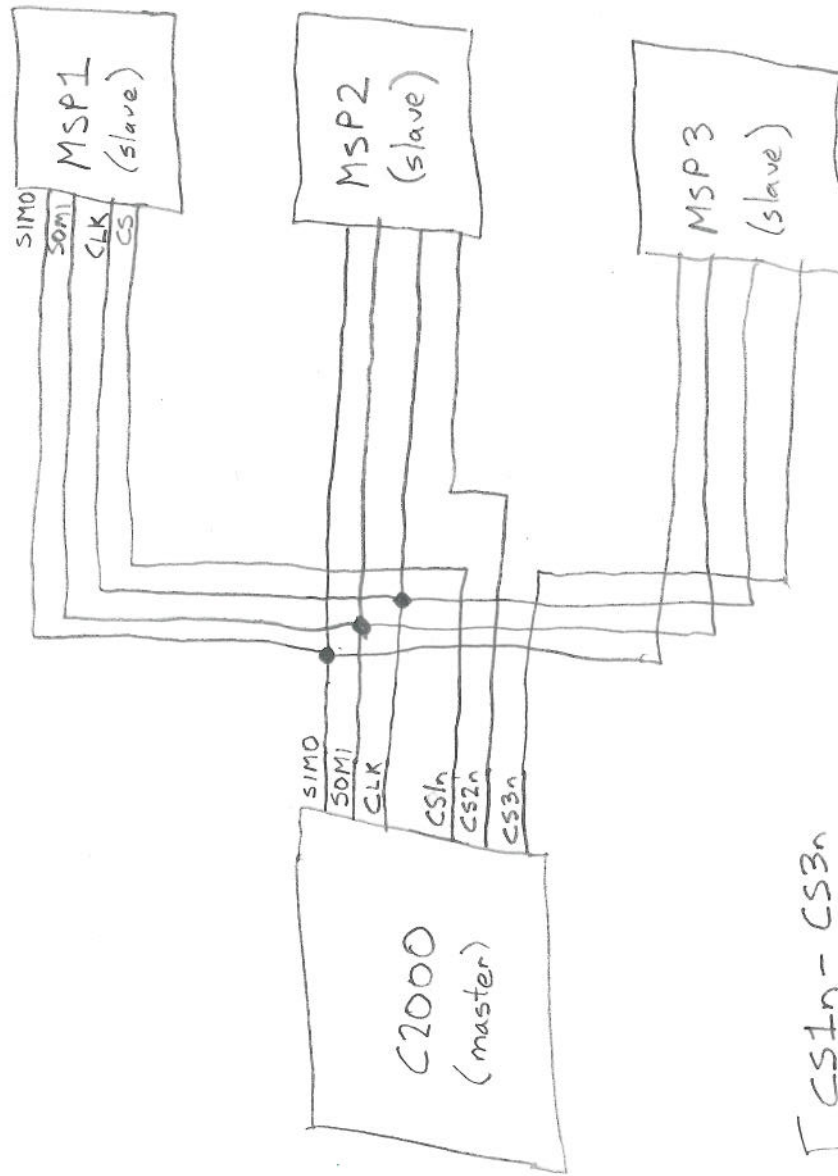

CS1n - CS3n
are active-low signals.
They are software-controlled
GPIO pins on the C2000 device.

The C2000's SPISTE pin
is not used.