"NOTICE"
THE INFORMATION CONTAINED HEREIN IS
PROPRIETARY TO CDA INTERCORP AND
SHALL NOT BE REPRODUCED OR DISCLOSED
IN WHOLE OR IN PART

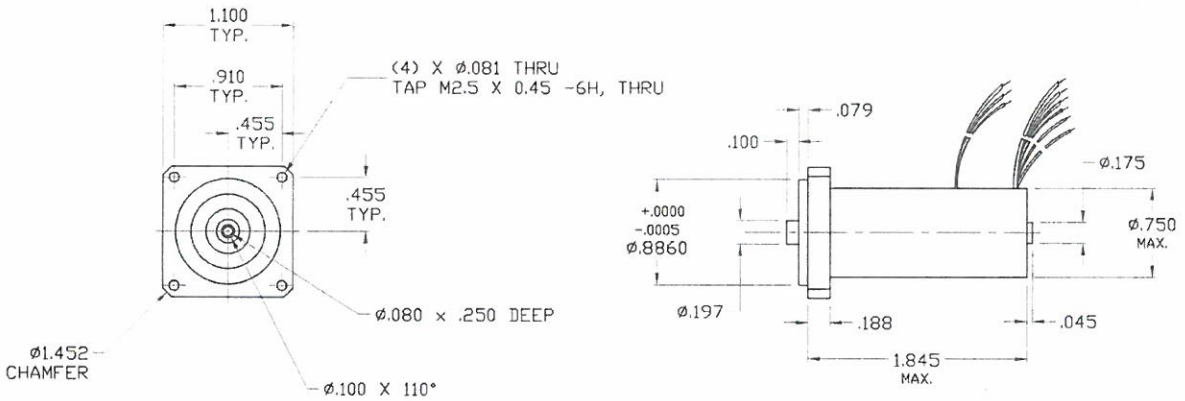

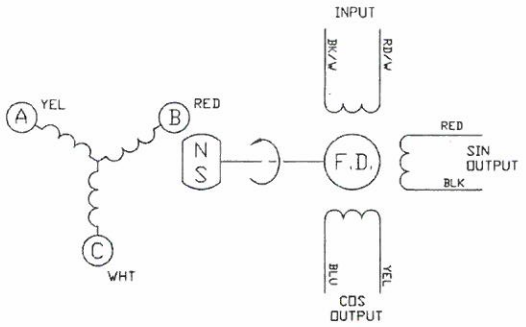

NOTE: DO NOT PENETRATE Ø.080 HOLE BEYOND .250 DEEP.

MOTOR DATA

PERFORMANCE AT 200°C UNIT TEMP	
EXCITATION (VDC)	24
POWER OUTPUT AT 1800 RPM (WATTS)	21.5
TORQUE OUTPUT AT 1800 RPM (LB-IN)	1.0

FIELD DIRECTOR DATA

PERFORMANCE AT 200°C UNIT TEMP	
EXCITATION (VRMS)	4.0
FREQUENCY (KHZ)	20
OUTPUT (VRMS)	2.0

PINION DATA

No. OF TEETH	N/A
PITCH AT 20 DEGREE P.A.	
THEO. PITCH DIA.	
TESTING RADIUS	
OUTSIDE DIA. (REF.)	
INVOLUTE TOOTH FORM	
AGMA QUALITY No.	

N04-A03-156 A

CUSTOMER	TLECWBK
CUSTOMER SPECIFICATION	ITC GA3
N.S.N.	-

ISS	DESCRIPTION	APPR
1	07-05-13: REL. @ 13072A3	

CDA INTERCORP
DEERFIELD, FLORIDA
CAGE 51761

TITLE: BRUSHLESS MOTOR

APPL. ENGR.	PROD. ENGR.	APPR.
RTH 07-05-13	KYLE	RKY

UNSPECIFIED TOLERANCES
3 PLACE DEC= ± .003 ANGLES= ± 2°

PART No. GA3 REV. A

10

BPMM