



**GENERAL ELECTRONICS BATTERY CO., LTD.**

No.: SPE275

Version: 01

Date: 2015-09-03

# Product Specification

## for Polymer Lithium-ion Battery

**Model Number: GEB603759**



# GENERAL ELECTRONICS BATTERY CO., LTD.

## Product Specification for GEB603759

No.: SPE275

Version: 01

Date: 2015-09-03

### 1. Scope

This document describes the performance characteristics and testing methods for Polymer Li-ion Batteries produced by GE Battery Co., Limited.

### 2. Product Type and Model Number

#### 2.1 Product Type

Polymer Lithium-ion Battery

#### 2.2 Model Number

GEB603759

### 3. Specification

No.	Item	Characteristics	Remarks
3.1	Nominal Capacity	Minimum: 1500mAh Typical: 1550mAh	Fully charged @0.2C to 4.2V for 2.5 hrs, then discharge to 3.0V @ 0.2C.
3.2	Nominal Voltage	3.7V	
3.3	Charging Cut-off Voltage	4.20V	
3.4	Discharge Cut-off Voltage	3.0V	
3.5	Max. Charging Current	1500mAh (1C)	
3.6	Max. Discharging Current	3000mAh (2C)	
3.7	Operating Temperature	Charge 0~45°C Discharge -20~60°C	
3.8	Storage Temperature	-20~45°C for 1Month -20~35°C for 6Months	
3.9	Impedance	30mΩ	Maximum value
3.10	Weight	30g	Approximate value

### 4. Dimensions

Please refer the drawing in appendix 1.

### 5. Appearance

No scratches, dirt, defect, leakage of electrolyte or gassing should be observed as a new product.

### 6. Characteristics

#### 6.1 Electrochemical Performance Characteristics

No.	Item	Testing Method	Requirements
1	Fully Charged State	CCCV or Constant current charge to 4.2V @1C follow by a constant voltage holding at 4.2V until current drops below 20±5mA.	
2	Rated Capacity	CCCV at 4.2V (per 6.1.1) at room temp. (20±5°C), rest for 1-2 hrs then discharge at a constant current of 0.2C to 3.0V, testing will be terminated by either 5 cycles or any one discharge time exceeds 5 hrs	≥1500mAh



# GENERAL ELECTRONICS BATTERY CO., LTD.

## Product Specification for GEB603759

No.: SPE275

Version: 01

Date: 2015-09-03

3	Cycle Life @25℃	Discharge to 3.0V @1C, then CCCV charge to 4.2V, rest for 10 min. discharge @ 1C to 3.0V and rest for 10 min. Continue the charge/discharge cycles until discharge capacity lower than 80% of rated capacity.	Cycle life $\geq 300$
4	Internal Impedance	Internal impedance is measured on a 50% charged battery at 1KHz AC at ambient temperature $(20 \pm 2)^\circ\text{C}$ .	$\leq 30\text{m}\Omega$
5	Capacity Retention	Fully charge cells per 6.1.1, store them at $(20 \pm 2)^\circ\text{C}$ for 28 days, then discharge the cells to 3.0V at 0.2C.	Discharge capacity $\geq 1275\text{mAh}$
6	High Temperature Characteristics	Fully charge cells per 6.1.1, store them at $(55 \pm 2)^\circ\text{C}$ for 2 hours, then discharge the cells to 3.0V at 0.2C.	Discharge capacity $\geq 1275\text{mAh}$
7	Low Temperature Characteristics	Fully charge cells per 6.1.1, store them at $(-10 \pm 2)^\circ\text{C}$ for 16~24 hours, then discharge the cells to 3.0V at 0.2C.	Discharge capacity $\geq 900\text{mAh}$
8	Cell Voltage during Transportation	Check open circuit voltage (OCV) of cells prior to the delivery to customers.	$\geq 3.75\text{V}$

### 6.2 Safety Characteristics

No.	Item	Test Method	Requirements
1	Overcharge	Discharge cells to 3.0V at 1C, then charge to 4.8V at 3C and rest for 8 hours.	No fire No explosion
2	Over Discharge	Fully charge cells per 6.1.1, then discharge at 3.0C. The test will be terminated when -10V is reached or discharging time exceeds 2.5 hours.	No fire No explosion
3	Nail Penetration	Penetrate a stainless steel nail with diameter between 2.0 ~ 5.0mm through a fully charged battery.	No fire No explosion
4	Hot Oven Test	Put a fully charged battery in a forced air oven and raise the temperature at $5 \pm 2^\circ\text{C}/\text{min.}$ to $150 \pm 2^\circ\text{C}$ . Rest for 10 minutes.	No fire No explosion

### 6.3 Reliability

No.	Item	Test Method	Requirements
1	High Temperature Test	Fully charged per 6.1.1, then stored the cells at $60 \pm 2^\circ\text{C}$ for 2 hours.	Electrochemical performance、visual test not changed



# GENERAL ELECTRONICS BATTERY CO., LTD.

## Product Specification for GEB603759

No.: SPE275

Version: 01

Date: 2015-09-03

2	Low Temperature Test	Fully charge cells per 6.1.1, store them at $-20 \pm 2^{\circ}\text{C}$ for 2 hours. Then, cells are placed at room temperature for 3 hours.	No appreciable alternation electrochemically and visually
3	Humidity Test	Fully charge cells per 6.1.1, stored them at $40 \pm 2^{\circ}\text{C}$ with 90% ~ 95RH% for 48 hours. Then the cells are placed at room temperature to "dry out" for 2 hours.	No appreciable alternation electrochemically and visually

### 7. Standard Testing Environment

Temperature :  $25 \pm 2^{\circ}\text{C}$

Relative humidity :  $45 \pm 20\%$  (unless specially requested)

### 8. Required Protective Functions

To ensure safety, the cells need to be assembled with PTC and protective circuitry (refer appendix 2) to prevent abusive situations occur such as over charge and over discharge or over current. The charger and protective circuitry should be consistent with the requirements listed below:

No	Device	Items	Requirements
1	Charger	Charge termination voltage	$4.200 \pm 0.049\text{V}$
2	Protective Circuitry (For reference only)	Overcharge detection voltage	$4.275 \pm 0.025\text{V}$
3		Overcharge release voltage	$4.175 \pm 0.050\text{V}$
4		Discharge termination voltage	$3.00 \pm 0.10\text{V}$
5		Over discharge detection voltage	$2.3 \pm 0.08\text{V}$
6		Over discharge release voltage	$2.4 \pm 0.10\text{V}$
7		Over discharge detection value	$2.7 \pm 0.2\text{A}$

### 9. Warranty

Warranty period for this product is 12 months starting from the date when the products left the door of manufacturer.

### 10. Liability

The user has to operate the products according to the instructions printed on the battery label or follow the advices described in this "Product Specification for Polymer Lithium Ion Batteries" published by GE Battery Co., Ltd. In case the battery were overheated or even catch fire or explosion caused by mishandling of the user side, GE Battery Co., Ltd. will not be liable for the lose caused by any of such mishandling.

GE Battery Co., Ltd. will notify the users in written form if any modifications in specification.

### 11. Battery Packing Label

The following warnings should be indicated on the battery pack labels.

Use a specified charger.

Do not throw the battery into fire, or heat.



Do not short-circuit the battery terminals.

Do not disassemble the battery.

## **12. Warnings and Cautions in Handling the Polymer Lithium-ion Battery**

To prevent potential leaking, overheating or explosion of batteries please be advised to take following precautions:

### **WARNINGS!**

Do not immerse the battery in water or seawater, and keep the battery in a cool dry environment during stands by period.

Do not use or leave the battery near a heat source such as fire or heater.

When recharging, use the battery charger specifically for that purpose.

Do not reverse the position (+) and negative (-) terminals.

Do not connect the battery to an electrical outlet.

Do not dispose the battery in fire or heat.

Do not short-circuit the battery by directly connecting the positive (+) and negative (-) terminal with metal objects such as wire.

Do not transport or store the battery together with metal objects such as necklaces, hairpins etc.

Do not strike or throw the battery against hard surface.

Do not directly solder the battery and pierce the battery with a nail or other sharp object.

### **CAUTIONS!**

Do not use or leave the battery at very high temperature (for example, at strong direct sunlight or in a vehicle in extremely hot weather). Otherwise, it can overheat or fire or its performance will be degenerate and its service life will be shortened.

Do not use it in a location where static electricity is rich, otherwise, the safety devices may be damaged, causing a harmful situation.

In case the electrolyte gets into the eyes due to the leakage of battery, do not rub the eyes! Rinse the eyes with clean running water, and seek medical attention immediately. Otherwise, it may injure eyes or cause a loss of sight.

If the battery gives off an odor, generates heat, becomes discolored or deformed, or in any way appear abnormal during use, recharging or storage, immediately remove it from the device or battery charger and place it in a contained vessel such as a metal box.

In case the battery terminals are contaminated, clean the terminals with a dry cloth before use. Otherwise power failure or charge failure may occur due to the poor connection between the battery and the electronic circuitry of the instrument.

Be aware discarded batteries may cause fire, tape the battery terminals to insulate them before disposal.



# GENERAL ELECTRONICS BATTERY CO., LTD.


## Product Specification for GEB603759

No.: SPE275

Version: 01

Date: 2015-09-03

### Appendix 1: Cell dimensions with unit in mm

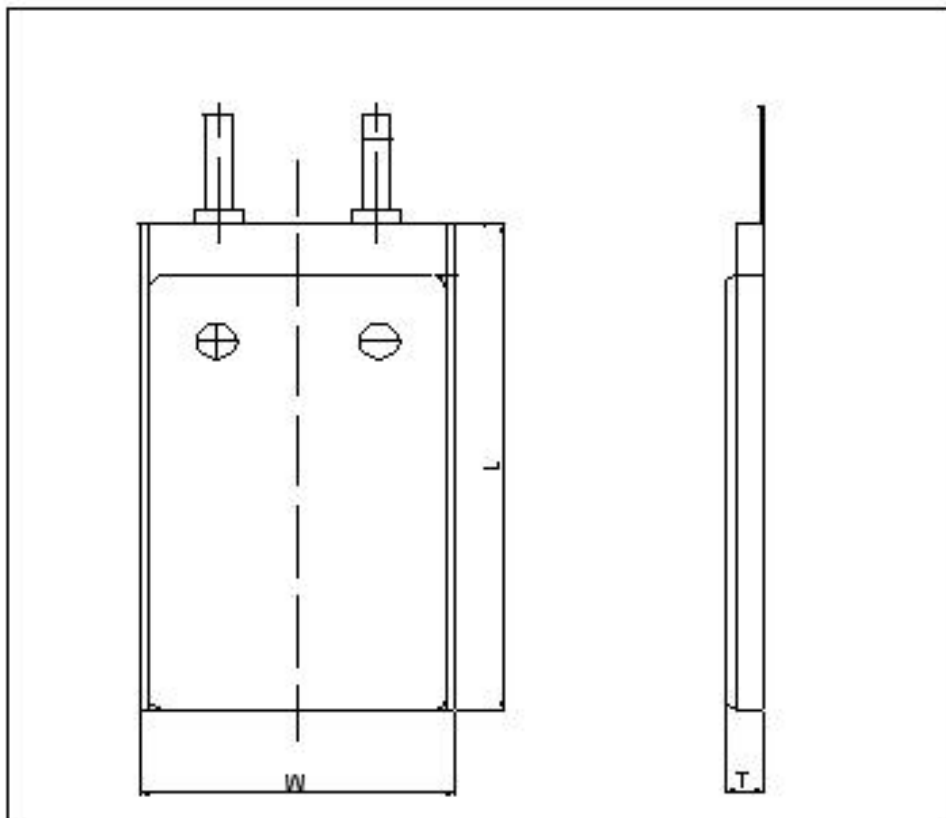

Item	Description	Dimension (mm)
T	Thickness	6.2 max
W	Width	37.5 max
L	Length	59.5 max

